

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark
Office
(Box PCT)
Crystal Plaza 2
Washington, DC 20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 12 March 1999 (12.03.99)	
International application No. PCT/GB98/01975	Applicant's or agent's file reference
International filing date (day/month/year) 06 July 1998 (06.07.98)	Priority date (day/month/year) 16 July 1997 (16.07.97)
Applicant GUTMAN, Richard, Guy et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:03 February 1999 (03.02.99)☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer C. Carrié Telephone No.: (41-22) 338.83.38
---	---

PCT

09/462765

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No.	International filing date (day/month/year)	(Earliest) Priority Date (day/month/year)
PCT/GB 98/ 01975	06/07/1998	16/07/1997
Applicant		
PALL CORPORATION et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 4 sheets.

☐ It is also accompanied by a copy of each prior art document cited in this report.

1. ☐ Certain claims were found unsearchable (see Box I).

2. ☒ Unity of invention is lacking (see Box II).

3. ☐ The international application contains disclosure of a **nucleotide and/or amino acid sequence listing** and the international search was carried out on the basis of the sequence listing

☐ filed with the international application.

☐ furnished by the applicant separately from the international application,

☐ but not accompanied by a statement to the effect that it did not include matter going beyond the disclosure in the international application as filed.

☐ Transcribed by this Authority

4. With regard to the title, ☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this International Search Report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is:

Figure No. 1 ☒ as suggested by the applicant.

☐ None of the figures.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/GB 98/01975

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01D63/06 B01D65/00 B01D65/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 096 306 A (AMF INC.) 21 December 1983 ESPECIALLY PAGES 4-6, 9, 12, 18-22, 31	1,43
Y	US 4 101 423 A (W. S. MERRILL ET AL.) 18 July 1978 ESPECIALLY CLAIMS AND COLUMN 2, LINES 33-61, COLUMN 3 LINE 61-COLUMN 4 LINE 12, COLUMNS 6-8, COLUMN 9 LINE 52-COLUMN 10 LINE 35	1,43
Y	US 5 647 950 A (C. L. REED) 15 July 1997 ESPECIALLY COLUMN 13 LINE 13 TO COLUMN 14 LINE 4	1,43
A	see the whole document	2
Y	US 3 939 078 A (F. M. SERVAS) 17 February 1976 ESPECIALLY COLUMN 2, LINES 26-32	1,43

-/--



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 October 1998

Date of mailing of the international search report

07. 01. 99

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

DEVISME, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/01975

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 361 483 A (D. B. PALL) 30 November 1982 ESPECIALLY COLUMN 1, LINES 15-25 AND COLUMN 6 LINE 45 TO COLUMN 7 LINE 50 ---	1,43
Y	US 5 531 848 A (P. D. BRINDA ET AL.) 2 July 1996 ESPECIALLY COLUMN 2, LINE 22 TO COLUMN 3, LINE 16 AND COLUMN 4, LINE 61 TO COLUMN 5, LINE 10 ---	1,43
A	EP 0 282 045 A (OSMONIC INC.) 14 September 1988 see the whole document ---	30
A	US 4 126 559 A (R. B. COOPER) 21 November 1978 see the whole document -----	30

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 98/01975

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. Claims : 1-42 heat sterilizable plastic housing and water wettable joints between water wettable filter and end caps
2. Claims : 43-51 heat sterilizable plastic housing and integrity testable filter
3. Claims : 52-65 valve for filter assembly

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-51

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/01975

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 96306	A	21-12-1983	AU 1773483 A	16-12-1983
			CA 1184512 A	26-03-1985
			WO 8304186 A	08-12-1983
			US 4929354 A	29-05-1990
			US 4906371 A	06-03-1990
			CA 1200766 A	18-02-1986
			US 4579698 A	01-04-1986
US 4101423	A	18-07-1978	CA 1058096 A	10-07-1979
			DE 2614336 A	21-10-1976
			FR 2306001 A	29-10-1976
			GB 1543404 A	04-04-1979
			JP 51122871 A	27-10-1976
			JP 59023846 B	05-06-1984
			SE 427527 B	18-04-1983
			SE 7603933 A	05-10-1976
US 5647950	A	15-07-1997	CA 2072532 A	29-12-1992
			EP 0520737 A	30-12-1992
			JP 6142416 A	24-05-1994
US 3939078	A	17-02-1976	NONE	
US 4361483	A	30-11-1982	AT 24415 T	15-01-1987
			AU 531213 B	11-08-1983
			AU 9006182 A	12-05-1983
			BR 8206329 A	06-09-1983
			CA 1192143 A	20-08-1985
			DK 483482 A, B,	03-05-1983
			EP 0078419 A	11-05-1983
			FI 823722 A	03-05-1983
			JP 1376685 C	08-05-1987
			JP 58092437 A	01-06-1983
			JP 61044531 B	03-10-1986
			PT 75770 B	09-12-1985
			ZA 8207961 A	31-08-1983
US 5531848	A	02-07-1996	US 5543002 A	06-08-1996
			AT 144725 T	15-11-1996
			AU 4279493 A	13-12-1993
			CA 2135672 A	25-11-1993
			DE 69305742 D	05-12-1996
			DE 69305742 T	10-04-1997
			DK 641247 T	01-04-1997
			EP 0641247 A	08-03-1995
			GR 3022069 T	31-03-1997
			JP 9234351 A	09-09-1997
			JP 2618820 B	11-06-1997
			JP 7503407 T	13-04-1995
			WO 9323152 A	25-11-1996
			US 5554283 A	10-09-1996
EP 282045	A	14-09-1988	US 4839037 A	13-06-1989
			AT 110292 T	15-09-1994
			CA 1320143 A	13-07-1993
			DE 3851167 D	29-09-1994
			DE 3851167 T	13-04-1995
			JP 63291603 A	29-11-1989

INTERNATIONAL SEARCH REPORT

Information on patent family members



International Application No

PCT/GB 98/01975

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4126559 A	21-11-1978	AT 365084 B	10-12-1981
		AT 217077 A	15-05-1981
		AU 507700 B	21-02-1980
		AU 2248277 A	31-08-1978
		BE 853015 A	30-09-1977
		BR 7701977 A	24-01-1978
		CA 1080130 A	24-06-1980
		DE 2710894 A	13-10-1977
		DK 138677 A,B,	01-10-1977
		FI 770920 A,B,	01-10-1977
		FR 2346035 A	28-10-1977
		GB 1532102 A	15-11-1978
		JP 1028887 C	22-01-1981
		JP 52119574 A	07-10-1977
		JP 55018124 B	16-05-1980
		NL 7703399 A	04-10-1977
		SE 441146 B	16-09-1985
		SE 7703577 A	01-10-1977
		ZA 7700961 A	28-12-1977

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 2/W32044WO		FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/GB98/01975	International filing date (day/month/year) 06/07/1998	Priority date (day/month/year) 16/07/1997	
International Patent Classification (IPC) or national classification and IPC B01D63/06			
Applicant PALL CORPORATION et al.			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 5 sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <p>I <input checked="" type="checkbox"/> Basis of the report</p> <p>II <input type="checkbox"/> Priority</p> <p>III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</p> <p>IV <input checked="" type="checkbox"/> Lack of unity of invention</p> <p>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</p> <p>VI <input type="checkbox"/> Certain documents cited</p> <p>VII <input type="checkbox"/> Certain defects in the international application</p> <p>VIII <input checked="" type="checkbox"/> Certain observations on the international application</p>			
Date of submission of the demand 03/02/1999		Date of completion of this report 21.10.99	
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465		Authorized officer Katsoulas, K Telephone No. +49 89 2399 8613 	

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB98/01975

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

1-20 as originally filed

Claims, No.:

1-65 as originally filed

Drawings, sheets:

1/3-3/3 as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

IV. Lack of unity of invention

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.
- ☐ paid additional fees.
- ☐ paid additional fees under protest.
- ☒ neither restricted nor paid additional fees.

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB98/01975

2. ☐ This Authority found that the requirement of unity of invention is not complied and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.
3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is
- ☐ complied with.
- ☒ not complied with for the following reasons:
- see separate sheet**
4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:
- ☐ all parts.
- ☒ the parts relating to claims Nos. 1-42.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-42
	No:	Claims	
Inventive step (IS)	Yes:	Claims	6,18,22-27
	No:	Claims	1-5,7-17,19-21,28-41
Industrial applicability (IA)	Yes:	Claims	1-42
	No:	Claims	

2. Citations and explanations

see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

see separate sheet

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB98/01975

D1: EP-A-0096306; D2: US-A-4101423

Ad Section IV:

1. The separate inventions/groups of invention are:

A: Claims 1-42 concerning a filter assembly essentially comprising a heat sterilisable plastics housing, a filter element embedded in end caps and water wettable joints between the filter element and the end caps.

B: Claims 43-51 concerning a filter assembly comprising a heat sterilisable plastics housing and an integrity testable filter element.

C: Claims 52-65 concerning a valve for a filter assembly.

2. The common subject-matter of groups A and B i.e. a filter assembly comprising a heat sterilisable plastics housing comprising a filter element is generally known from e.g. US-A-3939078, US-A-4361483 and US-A-5531848, as already indicated by the International Search Authority on 26.10.98 (Form 206). Since the distinguishing feature(s) of the independent claims of groups A and B are neither the same or equivalent, these claims lack unity a posteriori.

3. None of the features of independent claim 52 in group C is included in either claim 1 (group A) or claim 43 (group B). It follows that no single general inventive concept is present (Rule 13.1 PCT) and as such claim 52 lacks unity a priori.

4. In the absence of any response, preliminary examination has been carried out based on group A, which is considered as the main group.

Ad Section V:

1. Claim 1 differs from D1, which is considered as the closest prior art, the first and second end caps (35,36) form respective water-wettable joints with the filter medium. The problem to be solved concerns the ability of the filter element to be integrity tested. The same solution for the same problem however is addressed in


D2, wherein a hydrophilic sealing material (joint) is required to seal the hydrophilic membrane to the hydrophobic end cap. It is noted that the same disclosure of D2 is also present on page 11 of D1 itself. Thus, no inventive sep can be acknowledged (Art. 33(3) PCT).

2. The additional features of claims 2, 7-9, 13-17, 28 and 29 are also known from D1 (Art. 33(3) PCT).
3. The particular embodiments defined by claims 6, 18, 19 and 22-27 are not derivable from the available art, either alone or in combination. It follows that these claims meet the requirements of Art. 33(3) PCT.

Ad Section VIII:

1. In claim 1 it is unclear how said first and second end caps (35,36) form respective water-wettable joints with the filter medium, since said end caps have only been defined as of a plastics material (Art. 6).
2. Throughout the description, only the use of hydrophobic materials for the filter medium has been indicated. No support is available how these materials are rendered water-wettable, to fall within the scope of claim 1 (Art. 6 support).
3. For the present preliminary examination, it is assumed that both the filter element and the end caps are either hydrophilic or hydrophobic, which are made water-wettable by modification (cf. claim 4). Claim 1 should be in this respect appropriately restricted.
4. Independent claim 1 is not in the two-part form in accordance with Rule 6.3(b) PCT, which in the present case would be appropriate, with those features known in combination from the prior art (document D1) being placed in a preamble (Rule 6.3(b)(i) PCT) and with the remaining features being included in a characterising part (Rule 6.3(b)(ii) PCT).

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY



PCT

To:

MATHISEN, MACARA & CO.
The Coach House
6-8 Swakeleys Road, Ickenham
UXBRIDGE, MIDDX UB10 8BZ
GRANDE BRETAGNE

NOTIFICATION OF TRANSMITTAL OF
THE INTERNATIONAL PRELIMINARY
EXAMINATION REPORT
(PCT Rule 71.1)

Date of mailing
(day/month/year)

2 1. 10. 99

Applicant's or agent's file reference
2/W32044WO

IMPORTANT NOTIFICATION

International application No.
PCT/GB98/01975

International filing date (day/month/year)
06/07/1998

Priority date (day/month/year)
16/07/1997

Applicant
PALL CORPORATION et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

COMPUTER ENTRY

DUE DATE 16. 1. 00

CASE CODE W 32044WO

Name and mailing address of the IPEA/

 European Patent Office
D-80298 Munich
Tel. +49 89 2399 - 0 Tx: 523656 epmu d
Fax: +49 89 2399 - 4465

Authorized officer

Fuerbass, C

Tel. +49 89 2399-8132



PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 2/W32044WO	<div style="display: flex; justify-content: space-between;"> <div style="width: 40%;"> FOR FURTHER ACTION </div> <div style="width: 60%; font-size: small;"> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416) </div> </div>	
International application No. PCT/GB98/01975	International filing date (day/month/year) 06/07/1998	Priority date (day/month/year) 16/07/1997
International Patent Classification (IPC) or national classification and IPC B01D63/06		
Applicant PALL CORPORATION et al.		
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 5 sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of sheets.</p>		
<p>3. This report contains indications relating to the following items:</p> <ul style="list-style-type: none"> I <input checked="" type="checkbox"/> Basis of the report II <input type="checkbox"/> Priority III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability IV <input checked="" type="checkbox"/> Lack of unity of invention V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement VI <input type="checkbox"/> Certain documents cited VII <input type="checkbox"/> Certain defects in the international application VIII <input checked="" type="checkbox"/> Certain observations on the international application 		
Date of submission of the demand 03/02/1999	Date of completion of this report <div style="text-align: right; font-size: 1.2em;"> 2 1. 10. 99 </div>	
Name and mailing address of the international preliminary examining authority: <div style="display: flex; align-items: center;"> <div> European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465 </div> </div>	Authorized officer Katsoulas, K Telephone No. +49 89 2399 8613	



**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB98/01975

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

1-20 as originally filed

Claims, No.:

1-65 as originally filed

Drawings, sheets:

1/3-3/3 as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
☐ the claims, Nos.:
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

IV. Lack of unity of invention

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.
☐ paid additional fees.
☐ paid additional fees under protest.
☒ neither restricted nor paid additional fees.

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB98/01975

2. ☐ This Authority found that the requirement of unity of invention is not complied and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.
3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is
- ☐ complied with.
- ☒ not complied with for the following reasons:
- see separate sheet**
4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:
- ☐ all parts.
- ☒ the parts relating to claims Nos. 1-42.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-42
	No:	Claims	
Inventive step (IS)	Yes:	Claims	6,18,22-27
	No:	Claims	1-5,7-17,19-21,28-41
Industrial applicability (IA)	Yes:	Claims	1-42
	No:	Claims	

2. Citations and explanations

see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

see separate sheet

D1: EP-A-0096306; D2: US-A-4101423

Ad Section IV:

1. The separate inventions/groups of invention are:

A: Claims 1-42 concerning a filter assembly essentially comprising a heat sterilisable plastics housing, a filter element embedded in end caps and water wettable joints between the filter element and the end caps.

B: Claims 43-51 concerning a filter assembly comprising a heat sterilisable plastics housing and an integrity testable filter element.

C: Claims 52-65 concerning a valve for a filter assembly.

2. The common subject-matter of groups A and B i.e. a filter assembly comprising a heat sterilisable plastics housing comprising a filter element is generally known from e.g. US-A-3939078, US-A-4361483 and US-A-5531848, as already indicated by the International Search Authority on 26.10.98 (Form 206). Since the distinguishing feature(s) of the independent claims of groups A and B are neither the same or equivalent, these claims lack unity a posteriori.

3. None of the features of independent claim 52 in group C is included in either claim 1 (group A) or claim 43 (group B). It follows that no single general inventive concept is present (Rule 13.1 PCT) and as such claim 52 lacks unity a priori.

4. In the absence of any response, preliminary examination has been carried out based on group A, which is considered as the main group.

Ad Section V:

1. Claim 1 differs from D1, which is considered as the closest prior art, the first and second end caps (35,36) form respective water-wettable joints with the filter medium. The problem to be solved concerns the ability of the filter element to be integrity tested. The same solution for the same problem however is addressed in

D2, wherein a hydrophilic sealing material (joint) is required to seal the hydrophilic membrane to the hydrophobic end cap. It is noted that the same disclosure of D2 is also present on page 11 of D1 itself. Thus, no inventive step can be acknowledged (Art. 33(3) PCT).

2. The additional features of claims 2, 7-9, 13-17, 28 and 29 are also known from D1 (Art. 33(3) PCT).
3. The particular embodiments defined by claims 6, 18, 19 and 22-27 are not derivable from the available art, either alone or in combination. It follows that these claims meet the requirements of Art. 33(3) PCT.

Ad Section VIII:

1. In claim 1 it is unclear how said first and second end caps (35,36) form respective water-wettable joints with the filter medium, since said end caps have only been defined as of a plastics material (Art. 6).
2. Throughout the description, only the use of hydrophobic materials for the filter medium has been indicated. No support is available how these materials are rendered water-wettable, to fall within the scope of claim 1 (Art. 6 support).
3. For the present preliminary examination, it is assumed that both the filter element and the end caps are either hydrophilic or hydrophobic, which are made water-wettable by modification (cf. claim 4). Claim 1 should be in this respect appropriately restricted.
4. Independent claim 1 is not in the two-part form in accordance with Rule 6.3(b) PCT, which in the present case would be appropriate, with those features known in combination from the prior art (document D1) being placed in a preamble (Rule 6.3(b)(i) PCT) and with the remaining features being included in a characterising part (Rule 6.3(b)(ii) PCT).

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01D 63/06, 65/00, 65/10	A1	(11) International Publication Number: WO 99/03568 (43) International Publication Date: 28 January 1999 (28.01.99)
<p>(21) International Application Number: PCT/GB98/01975</p> <p>(22) International Filing Date: 6 July 1998 (06.07.98)</p> <p>(30) Priority Data: 9714965.2 16 July 1997 (16.07.97) GB</p> <p>(71) Applicant (for all designated States except US): PALL CORPORATION [US/US]; 2200 Northern Boulevard, East Hills, NY 11548 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): GUTMAN, Richard, Guy [GB/GB]; 29 Ferndale Road, Chichester, West Sussex PO19 4QJ (GB). BUTTERY, Roger, Alexander [GB/GB]; 37 Monks Orchard, Petersfield, Hampshire GU32 2JD (GB). WEIGHT, Kenneth, Roy [GB/GB]; 22 Hilda Gardens, Denmead, Hampshire PO7 6PQ (GB).</p> <p>(74) Agent: MATHISEN, MACARA & CO.; The Coach House, 6-8 Swakeleys Road, Ickenham, Uxbridge, Middlesex UB10 8BZ (GB).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: FILTER ASSEMBLY</p> <p>(57) Abstract</p> <p>The filter assembly has a filter medium (34) provided with end caps (35, 36) that form water-wettable junctions with the filter medium (34). The filter element (34) is encapsulated in a housing (10) which is formed from a plastics material capable of withstanding steam sterilization. This allows the filter element (34) to be steam sterilized in situ and avoids the need for steam autoclaving and aseptic transfer.</p> <div data-bbox="1039 1113 1494 1974"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

FILTER ASSEMBLY

The invention relates to filter assemblies.

5 A known form of filter assembly comprises a housing providing an inlet port and an outlet port with a filter element being held in the housing and comprising a filter medium having a central passage extending between first and second ends of the filter medium. The first end of the filter medium is
10 connected to an end cap to close the passage and the second end of the filter medium is in fluid communication with a port of the housing.

In this way, fluid passing to the housing flows through the
15 filter medium in a path including the inlet port, the outlet port and the passage. Such filters are used extensively for medical, biomedical and pharmaceutical purposes.

It is a requirement of such filter assemblies that the filter
20 element must be capable of being integrity tested. For water-wettable filter media integrity can be tested by the Water Bubble Point Test or the Diffusive Forward Flow Test. In the Water Bubble Point Test, the filter element is placed in a
water bath with both the first and second ends of the passage
25 closed and air is pumped into the passage at a pressure which

is increased until the first bubble is observed on the exterior of the filter medium. If the structure of the filter medium has integrity over its whole volume, this first bubble will appear at a predetermined pressure. If a bubble or bubbles appear at a lower pressure, it is an indication that the structure of the filter medium is not uniform over the whole volume of the filter medium. This can indicate the incidence of passages through the filter medium which might allow the passage through the medium in use of unfiltered or only partly filtered fluid.

In the Diffusive Forward Flow Test, the filter medium is wetted with water and surplus water is removed. Air is applied to one side of the medium at a specified pressure and the diffusive air flow rate is measured. This diffusive air flow rate has been found to be related to the removal rating of the medium. A greater than expected flow rate can indicate lack of integrity of the medium.

However, the connection to a water-wettable filter medium of an end cap can change the characteristics of the medium so that integrity testing is no longer possible. For example, the connection can produce hydrophobic zones in the medium which do not wet out in the integrity test and thus plainly affect the performance of the medium in the integrity test.

For this reason, the materials of the filter medium and the end cap are usually chosen so that connection of the medium and the end cap does not affect the characteristics of the medium in a manner that would affect the medium's performance in an integrity test.

The material of the end cap is also important for hydrophobic filter media. Some hydrophobic filter media are easily damaged by heat. These media are attached to the end cap by heating the end cap to soften the end cap and inserting the first end of the medium into the end cap while the end cap is softened. It is therefore important to choose a material for the end cap that softens at a relatively low temperature such that the connection can be carried out without damaging the media.

However, it is also a requirement for such filter assemblies that have medical, biomedical and pharmaceutical uses that they can be sterilized to allow for repeated use. There are two principal forms of sterilization; in situ steam sterilization and steam autoclaving. In in situ steam sterilization, instead of fluid to be filtered passing to the filter assembly, high pressure and high temperature steam are passed through the filter assembly. For example, the steam pressure may be several bars and the temperature 140°C. In

steam autoclaving, the filter assembly is removed from associated equipment and transferred to an autoclave where it is steam sterilized. The filter assembly is then removed from the autoclave, transferred aseptically and replaced in the equipment. A typical filter assembly might need sterilizing 100 times in its lifetime.

Where the housing of such a filter assembly is made of a plastics material, the second end of the filter medium is usually connected to the housing by heating the housing material and inserting the second end of the filter medium into the housing material. For water-wettable media, in order to produce a water wettable joint for integrity testing purposes, it is thus necessary to have the housing of an appropriate material that produces the required join. For hydrophobic media that are relatively easily damaged by heat it is necessary for the plastics material of the housing to have a relatively low softening temperature. Such plastics materials are not able to withstand the pressures and temperatures of in situ steam sterilization. Accordingly, such filter assemblies must be sterilized by autoclaving. This requires the filter assembly to be removed from service, autoclaved and then transferred aseptically back into service.

The known alternative is to house the filter element in a metal housing. The metal will withstand the temperatures and pressures of in situ steam sterilization but metal housings are typically much bulkier than plastics housings and are more expensive to produce and require cleaning before re-use.

According to a first aspect of the invention, there is provided a filter assembly comprising a plastics housing providing an inlet port and an outlet port, the material of the housing being such that the assembly can be sterilized by subjecting the interior of the housing to steam under pressure while the exterior of the housing is at atmospheric pressure without damaging the housing, a filter element held in the housing and comprising a filter medium of water wettable material having a central passage extending between first and second ends of the filter medium, the first end of the filter medium being embedded in a first end cap of a plastics material to close said passage and the second end of the filter medium being embedded in a second end cap of a plastics material, said second end cap providing a fluid connection between said passage and one of said ports, the first and second end caps forming respective water-wettable joints with the filter medium.

By end capping both ends of the filter medium, water wettable joints can be produced and a different material used for the housing that is steam sterilizable in situ.

5 According to a second aspect of the invention, there is provided a filter assembly comprising a housing having an inlet and an outlet and a filter element that is integrity testable by the Diffusive Forward Flow Test or the Water Bubble Point Test, that is held in the housing and that
10 comprises a filter medium having a central passage extending between first and second ends of the filter medium, the housing being formed from a plastics material that is steam sterilizable.

15 It is also a problem with such filter assemblies in providing valves for the inlet port and the outlet port. Such valves need to be capable of steam sterilization, and many are not.

According to a third aspect of the invention, there is
20 provided a valve for a filter assembly comprising an annular sleeve surrounding a passage of generally circular cross-section, movement of said sleeve in one sense opening said valve and movement of said sleeve in a sense opposite said one
sense closing said valve.

According to a fourth aspect of the invention there is provided a valve comprising a part defining a cylindrical passage and a valve member movable between a first position in which the member sits in and seals against the circumference of the passage to close the valve and a second position in which the member is located out of the passage to open the valve.

The following is a more detailed description of an embodiment of the invention, by way of example, reference being made to the accompanying drawings in which:-

Figure 1 is an exploded view of a filter assembly showing first and second parts of a filter housing, a filter element within the housing and valves connected to inlet and drainage ports of the housing,

Figure 2 is a cross-section on the axis of the housing of Figure 1, showing one valve in an open position and a second valve in a closed position,

Figure 3 is detail B of Figure 2 showing the open valve to a larger scale, and

Figure 4 is detail C of Figure 2 showing the closed valve to a larger scale.

Referring to the drawings, and particularly Figure 1, the filter assembly comprises a housing indicated generally at 10, a filter element 11 encapsulated in the housing 10 and two valves 12 carried by the housing 10.

The housing 10 comprises a first housing part 13 and a second housing part 14. Both parts are made, for example moulded, from a polysulphone material. The first housing part 13 includes an end wall 15 provided with an inlet port 16 for the medium to be filtered, and a circular cross-section side wall 17 extending downwardly from the end wall 15 and terminating at a circular edge 18. An outwardly facing annular rebate 19 is formed in the side wall 17 adjacent the edge.

An air vent port 20 is formed at the junction between the end wall 15 and the side wall 17 and extends in a direction generally radially relative to the axis 21 (see Figure 2) of the housing 10. The inner surface 60 of the air vent port 20 defines a passage having a smaller diameter portion 22 closer to the side wall 17 and a larger diameter portion 23 further from the side wall 17 and terminating at the end of the air vent port 20. Five ribs 61 extend into the larger diameter

portion 23 from the inner surface 60. The ribs 61 are spaced equi-angularly around the surface 60. Each rib 61 has an edge 62 that is continuous and in line with the inner surface 60 at the small diameter portion of the passage.

5

The air vent port 20 has an exterior surface 24 provided with an annular groove 25 adjacent the end of the port 20 which carries an O-ring seal 26. In addition, this surface 24 has two pins 27 projecting radially from the surface at respective positions on the surface spaced from the end of the port 20. The function of the seal 26 and the pins 27 is described below.

10

15

The second housing part 14 includes a second end wall 28 provided with a disc-shaped stand 29. The second end wall 28 has its end remote from the stand of generally annular shape coaxial with the axis 21 of the housing 10. This portion of the second end wall 28 is provided with an inwardly facing rebate 30.

20

As best seen in Figure 2, the second end wall 28 has an outlet port 31 in the form of a generally circular cross-section passage co-axial with the axis 21 of the housing 10 and extending through the second end wall 28 and the stand 29.

The end of the outlet port 31 within the housing 10 forms an annular flange 32.

A drainage port 33 is provided in the second end wall 28 and extends radially from the second end wall 28 relative to the axis 21 of the housing 10. The drainage port 33 is constructed similarly to the air vent port 20 (parts common to the two ports 20,33 are given the same reference numerals and will not be described in detail).

The filter element 11 comprises a filter medium 34, a first end cap 35, a second end cap 36 and a cage 37. The filter medium may be of any convenient material and any convenient shape that provides a central passage for the flow of fluid to be filtered. For example, the filter medium 34 may be annular. The material may be pleated or unpleated. Examples of suitable filter media are those sold by Pall Corporation under the trade marks ULTIPOR, FLUORODYNE, SUPOR and EMFLON.

The filter medium 34 has a first end and a second end with the passage extending between the ends. The first end cap 35 is disc-shaped and is formed from a plastics material. The first end cap 35 is preferably connected to the first end of the filter medium 34 by heating the end cap 35 to soften the end

cap 35 and then inserting the filter medium into the softened end cap material to form a join.

The material of the first end cap 35 is chosen so that, when the filter medium 34 is connected to the first end cap 35, the characteristics of the medium 34 are not materially changed. In particular, when the filter medium 34 is of a water-wettable material, the material of the first end cap is chosen to that a water wettable joint is formed between the filter medium 34 and the first end cap 35. In this case, the end cap material will depend on the material of the filter medium 34. For example, when the filter medium 34 is a FLUORODYNE or SUPOR medium, the end cap 35 may be composed of polypropylene. When the filter medium 34 is composed of a nylon material the first end cap 35 may be composed of a polyester or nylon material.

It is important to obtain a water-wettable joint between water-wettable filter media and the first end cap 35 in order to allow the filter element to be integrity tested. An integrity test involves the filter element being placed in a bath of water (with the ends of the passage closed) and air is then supplied to the passage at increasing pressure. The bath is then observed to determine at what pressure the first bubble appears on the exterior of the filter medium. If the

porous structure of the filter medium is integral over the whole area of the filter medium, then the first bubble will appear at a relatively high pressure. If, however, the porous structure is not integral over the whole area of the filter medium 34, then the first bubble will appear at a relatively lower pressure. If the junction between the first end cap 35 and the filter medium 34 is not water-wettable, it creates a hydrophobic zone through which air passes readily since the porous structure is not wetted out by water. Although this does not normally affect filtration during use of the assembly, it is not possible to test the integrity as described above. The formation of hydrophobic zones similarly prevents the medium being tested by the Diffusive Forward Flow Test described above.

Where the filter medium 34 is hydrophobic, it is important to ensure that the first end cap 35 is composed of a material that can be softened at a temperature that is sufficiently low so that the integrity of the medium 35 is not damaged by the insertion process. For example, when the filter medium 34 is composed of PVDF (such as an EMFLON 2 medium) the first end cap 35 may be composed of polypropylene. Where the filter medium 35 is composed of PTFE, which is relatively resistant to heat, it is also preferable to use polypropylene end caps.

The second end cap 36 comprises a flat annular portion 38 with a central aperture. A projecting tube 39 surrounds the aperture and extends away from the filter medium 34 in a direction normal to the plane of the flat annular portion 38.

5 The tube 39 is provided with two annular seals 40 on its exterior surface 41. Four flanges 42 project radially outwardly of the flat annular portion 38 and are equi-angularly spaced around this portion 38.

10 The outer diameter of the tube 39 is generally equal to the interior diameter of the outlet port 31.

For any filter medium 34, the material of the second end cap is chosen based on the same considerations affecting the choice of the material of the first end cap. The material of
15 the second end cap 36 will normally, but not necessarily, be the same as the material of the first end cap 35. The filter medium 34 is connected to the second end cap 36 by heating the second end cap 36 and then inserting the filter medium 34 into
20 the softened material. The cage 37, which is of known type, surrounds the exterior surface of the filter medium 34 between the first and second end caps 35,36.

The filter element 11 is mounted in the housing in the
25 following way. First, the tube 39 on the second end cap 36 is

inserted into the outlet port 31 in the second end wall 28. The seals 40 prevent leakage between these parts. When fully inserted, the flange 32 of the outlet port 31 bears against the under-surface of the flat annular portion 38 of the second end cap 36. This holds the filter element 11 in the second end wall 28 coaxial with the housing axis 21. In addition, it connects the interior passage of the filter medium 34 with the outlet port 31 via the tube 39.

The first housing part 13 is then placed over the filter element 11 with the edge 18 fitting within the second end wall 28 and the rebate 19 adjacent this edge mating with the rebate 30 in the second end wall 28. The first and second housing parts 13,14 are then welded together around the rebates 19,30.

When so positioned, the edge 18 of the side wall 17 bears against the flanges 42. The effect of this is to clamp the filter element 11 between this edge 18 and the end of the flange 32 surrounding the outlet port 31 and contacting the second end cap 36. In this way, the filter element 11 is held firmly in position encapsulated in the housing 10.

Referring next to Figures 3 and 4 in particular, the valves 12 control flow through the air vent port 20 and the drainage

port 33. The valves 12 are identical and so only one of them will be described.

The valve 12 comprises an elongated valve member 43 which is generally circular in cross-section. The valve member 43 has a blind end 44 within the associated port. The blind end 44 carries an O-ring 45 in a groove provided on an exterior surface. The remainder of the valve member 43 has an axial passage 46 leading to a connector 47 for connection to a hose or pipe. In Figure 3 the connector 47 has an annular triangular-section rib 63 and in Figure 4 the connector 47 has a succession of axially spaced ribs 64. At least one radial passage 48 connects the end of the axial passage 46 adjacent the blind end 44 with the exterior surface of the valve member 43.

A sleeve 49 is arranged coaxially with the axis of the valve member 43 and is spaced from the valve member 43 by an annular radially extending flange 50. The sleeve 49 is a sliding fit over the exterior surface 24 of the associated port 20,31. In addition, the sleeve is provided with two helical slots 51 (seen best in Figure 1) extending around a portion of the sleeve 49. Each pin 27 is received in a respective one of the slots 51.

The sleeve 49 can thus be rotated relative to the associated port 20,33 with such rotation being controlled by the engagement of the pin 27 in the slot 51 to cause the sleeve 49 also to move axially relative to the associated port 20,33. This rotation can take place in both senses.

The effect of this rotation is best seen in Figures 3 and 4. At one limit of rotation in one sense, as seen in Figure 3, the blind end 44 of the valve member 43 lies in the larger diameter portion 23 of the associated port 20,33. When so positioned, the valve member 43, and the associated O-ring 45, do not obstruct the port and so allow flow into the port, through the radial passage 48 and along the axial passage 46. Reverse flow is, of course, also possible. Leakage around the sleeve 49 is prevented by the O-ring seal 26 on the exterior surface 24 of the port 20,33. The O-ring 45 is kept pressed into the groove on the outer surface of the blind end by the ribs 61 - the edges 62 bearing against the O-ring 45.

Rotation of the sleeve 49 in the opposite sense moves the blind end 44 into the smaller diameter portion. The O-ring 45 is guided into the smaller diameter portion by the edges 62. Maximum rotation in the opposite sense disposes the valve member as shown in Figure 4. In this disposition, the blind end 44 lies within the smaller diameter portion 22 of the

associated port 20, 33. The O-ring 45 seals against the inner surface 60 of the port 20, 33 so preventing flow through the valve. It will be appreciated that because the seal is made against the circumference of the smaller portion 22 (and not, for example, against a radially extending seat) the port 20, 33 and the valve member 43 can undergo differential expansion during heating without causing damage to the valve as the blind end 44 simply moves axially with the small portion 22.

Thus, by twisting the sleeve 49 in one sense or the other, the associated port 20, 33 can be opening or closed. It will also be appreciated that the pin 27 and slot 51 mechanism prevents the valve 12 being disengaged completely from the associated port 20, 33.

The valves 12 are preferably made from a polysulphone material.

The housing parts 13, 14 and the valves 12 may also be made from any other suitable plastics material capable of withstanding in-line sterilization. As stated above, in-line sterilization involves passing steam under pressure through the housing. The exterior of the housing is kept at atmospheric pressure and so there is a pressure differential across the housing. The minimum temperature and pressure of

steam commonly used for sterilization is generally about 121°C at about 1 bar above atmospheric pressure, although in some circumstances, in particular if exposure to the steam is prolonged, sterilization may be achievable at lower
5 temperatures and pressures. However, it is often desirable to sterilize the assembly in-line under harsher conditions, for example using steam at about 142°C and about 2.83 bar above atmospheric pressure. The housing is preferably resistant to such harsher conditions. Examples of plastics other than
10 polysulphone that are suitable are PEEK, PEK, polyphenyleneoxide, polyphenylenesulphide, polyethersulphone polyalkoxysulphone and polyarylsulphone.

15 In use, the filter assembly described above with reference to the drawings is mounted in a line containing a fluid to be filtered. This may be, for example, a medical, biomedical or pharmaceutical fluid. A tube leading from a source of fluid to be filtered is connected to the inlet 16. The outlet port
20 31 is connected to a receiver of filtered fluid. The drainage port 33 is connected to a tube leading to a receiver for drained fluid. The valve 12 of the air vent port 20 is opened and the valve 12 of the drainage port 33 is closed. Fluid to
be filtered is then fed through the inlet 16 to fill the
25 housing 10. The air vent port 20 is then shut. The fluid

passes through the filter medium 34 where it is filtered and the filtered fluid enters the passage before passing through the tube 39 and the outlet port 31.

5 When the filter assembly is to be sterilized, the inlet 16 is disconnected from the supply of fluid to be filtered and the outlet port 31 is disconnected from the receiver of filtered fluid. The drainage port valve 12 is open to drain excess fluid from the housing 10. The inlet 16 is then connected to
10 a supply of steam under pressure and the outlet port 31 is connected to a drain. The valves 12 are left slightly open. Steam at the pressure of several bars and a temperature of about 140°C is then fed through the housing to steam sterilize the filter material 34 and the other components. The housing
15 10, since it is made of polysulphone (or another suitable plastics material), is able to withstand the temperature and pressure of the steam. The same is true of the valves 12; because they are made of polysulphone (or another suitable plastics material), they will withstand the in-line steam
20 sterilization without damage.

Once steam sterilization is complete, water can be drained by fully opening the drainage port valve 12 and the filter assembly reconnected for filtering fluid.

By separating the caps 35,36 from the housing 10, these parts can be made in different materials to provide the water wettability necessary for the filter medium 34 and the resistance to in-line steam sterilization necessary for the housing 10.

It will be appreciated that there are a number of modifications that can be made to the arrangement described above.

The valves 12 need not be as described above. Any suitable valves could be used. The plastics material of the housing 10 need not be polysulphone, it could be any material that is capable of withstanding in-line steam sterilization. The filter element 11 need not be clamped in the housing 10 as described, it could be held in any suitable way. The cage 37 need not be as described, any suitable cage could be provided. The filter medium 34 may be provided with upstream and/or downstream drainage layers.

CLAIMS

1. A filter assembly comprising a plastics housing (10) providing an inlet port (16) and an outlet port (31), the material of the housing (10) being such that the assembly can be sterilized by subjecting the interior of the housing (10) to steam under pressure while the exterior of the housing (10) is at atmospheric pressure without damaging the housing, a filter element (11) held in the housing (10) and comprising a filter medium (34) of water wettable material having a central passage extending between first and second ends of the filter medium (34), the first end of the filter medium being embedded in a first end cap (35) of a plastics material to close said passage and the second end of the filter medium being embedded in a second end cap (36) of a plastics material, said second end cap (36) providing a fluid connection between said passage and one of said ports (16,31), the first and second end caps (35,36) forming respective water-wettable joints with the filter medium (34).

2. A filter assembly according to claim 1, wherein said embedding involves heating the end caps (35,36) to soften the end caps and inserting each one of said first and second ends into the associated end cap (35,36) while the associated end cap (35,36) is softened.

3. A filter assembly according to claim 2, wherein said first and second end cap plastics material is such that the characteristics of the filter medium (34) adjacent to the end caps are not altered by said embedding.

4. A filter assembly according to any one of claims 1 to 3, wherein the filter medium (34) is composed principally of PVDF which has been modified to make the medium water-wettable, and the first and second end caps (35,36) are composed of polypropylene.

5. A filter assembly according to any one of claims 1 to 3, wherein the filter medium (34) is composed principally of polysulphone which has been modified to make the medium water-wettable, and the first and second end caps (35,36) are composed of polypropylene.

6. A filter assembly according to any one of claims 1 to 3, wherein the filter medium (34) is a FLUORODYNE or SUPOR medium and the first and second end caps 35,36 are composed of polypropylene.

7. A filter assembly according to any one of claims 1 to 3, wherein the filter medium (34) is composed of a nylon

material and the first and second end caps (35,36) are composed of a polyester or a nylon material.

8. A filter assembly according to any preceding claim wherein the filter element (34) is integrity testable by the Diffusive Forward Flow Test or by the Water Bubble Point Test.

9. A filter assembly according to claim 2 or claim 3, wherein the plastics material of the first and second end caps (35,36) can be softened at a temperature which is sufficiently low such that the integrity of the filter medium (34) is undamaged when the filter medium (35,36) is inserted into the first and second end caps (35,36) when the first and second end caps (35,36) are at said temperature.

10. A filter assembly according to claim 9, wherein the filter medium (34) is hydrophobic.

11. A filter assembly according to claim 10, wherein the filter medium (34) is composed of PTFE and the first and second end caps (35,36) are composed of polypropylene.

12. A filter assembly according to claim 10, wherein the filter medium (34) is composed of PVDF and the first and second end caps (35,36) are composed of polypropylene.

13. A filter assembly according to any preceding claim, wherein the housing (10) resists exposure of the interior of the housing (10) to steam at about 121°C and about 1 bar above atmospheric pressure while the exterior of the housing (10) is exposed to atmospheric pressure.

14. A filter assembly according to any preceding claim, wherein plastics material of the housing (10) is one of polysulphone, PEEK, PEK, polyphenyleneoxide, polyphenylenesulphide, polyethersulphone, polyalkoxysulphone or polyarylsulphone.

15. A filter assembly according to any preceding claim, wherein said filter medium (34) is generally annular, the first end cap (35) being generally disc-shaped and the second end cap (36) being generally annular with a central aperture for connection to one of said ports (16,31) of the housing.

16. A filter assembly according to claim 15, wherein the filter medium (34) is pleated.

17. A filter assembly according to claim 15 or claim 16, wherein the second end cap (31) includes a projection (39) defining a fluid path, said projection (39) being received in

the associated port (16,31) to provide fluid communication therebetween.

18. A filter assembly according to claim 17, wherein said housing (10) includes first and second opposed end walls (15,28), said housing port (31) in fluid communication with the second end cap (31) being formed in said second end wall (28), the filter element extending from said second end wall (28) towards said first end wall (15).

19. A filter assembly according to claim 18, wherein the housing (10) has a side wall (17) of generally circular cross-section extending between said first and second end walls (15,28).

20. A filter assembly according to any preceding claim, wherein the housing (10) is formed by first and second housing parts (13,14) connected together.

21. A filter assembly according to claim 20 when dependent on claim 19, wherein the first housing part (13,14) includes said first end wall (15) and said side wall (17) and the second housing part (14) includes said second end wall (28).

22. A filter assembly according to claim 20 or claim 21, wherein the first housing part (13) and the second housing part (14) co-operate to clamp the filter element (11) between said housing parts (13,14) to hold the filter element in the housing.

23. A filter element according to claim 22, wherein the filter element (11) includes first and second oppositely facing clamping surfaces, the first housing part (13) bearing against the first clamping surface and the second housing part (14) bearing against the second clamping surface.

24. A filter element according to claim 23, wherein said first and second clamping surfaces are formed on said second end cap (31).

25. A filter element according to claim 24, wherein the first clamping surface is formed on at least one flange (42) projecting from said second end cap (31).

26. A filter assembly according to claim 24 or claim 25, when dependent on claim 18, wherein said second clamping surface is formed on a portion of said second end cap (31) extending around said projection (34).

27. A filter assembly according to claim 25 and claim 26 wherein said first housing part (13) has a peripheral edge (18) remote from said first end wall (15), said peripheral edge (18) bearing against said at least one flange (42) to force the second clamping surface against a portion of the second end wall (28) of the housing (10) around the associated port (31).

28. A filter assembly according to any preceding claim, wherein the filter medium (34) is annular and has a curved exterior surface surrounded by a cage (37).

29. A filter assembly according to claim 28 wherein the cage (37) is formed from the same material as the end caps (35,36).

30. A filter assembly according to any preceding claim, wherein the housing (10) is provided with at least one valve (12) that is manually operable to open and close the valve, the valve when open providing a fluid flow path between the exterior and the interior of the housing (10).

31. A filter assembly according to claim 30, wherein the or each said valve (12) is formed from materials that can be steam autoclaved.

32. A filter assembly according to claim 31, wherein the or each valve (12) is such that the assembly can be sterilized by subjecting the interior of the housing (10) to steam under pressure while the exterior of the housing (10) is at atmospheric pressure without damaging the valve (12).

33. A filter assembly according to claim 30, wherein the or each valve (12) is resistant to exposure of the interior of the housing to steam at about 121°C and about 1 bar above atmospheric pressure while the exterior of the housing is exposed to atmospheric pressure.

34. A filter assembly according to any one of claims 30 to 33, wherein the or each said valve (12) is formed principally from one of polysulphone, PEEK, PEK, polyphenyleneoxide, polyphenylenesulphide, polyethersulphone polyalkoxysulphone or polyarylsulphone.

35. A filter assembly according to any one of claims 30 to 35, wherein the or each valve (12) includes an annular sleeve (49) surrounding a passage (48) generally circular in cross-section, movement of said annular sleeve (49) in one sense opening said valve and movement of the annular sleeve (49) in a sense opposite said one sense closing said valve (12).

36. A filter assembly according to claim 35, wherein the or each passage (48) contains a valve member (43), movement of the associated sleeve (49) causing said valve member (43) to move between a first position in which said valve member (43) permits flow through said passage (48) and a second position in which said valve member (43) prevents flow through said passage (48).

37. A filter assembly according to claim 36, wherein the or each valve member (43) moves axially relative to the associated passage (48) between said first and second positions.

38. A filter assembly according to claim 37, wherein the sleeve (49) and the valve member (43) of the or each valve (12) are connected together, the sleeve (49) surrounding said associated passage (46) and the valve member (43) extending into an end of said passage (48), said valve member (43) including a passage (48) which is in fluid communication with the associated passage (46) when the valve (12) is open and which is not in fluid communication when the valve (12) is closed.

39. A filter assembly according to any one of claims 35 to 38, wherein, for the or each valve (12), a mechanism acts

between the sleeve (49) and the housing (10) such that rotation of the sleeve (49) results in axial movement of said valve member (43) between said first and second positions.

5 40. A filter assembly according to claim 39, wherein the or each mechanism limits the extent of the axial movement of the associated valve member (43).

10 41. A filter assembly according to claim 39 or claim 40 wherein the or each mechanism comprises a pin (27) and a co-operating slot (51).

15 42. A filter assembly according to claim 41 wherein the or each pin (27) is carried on an exterior surface of the housing (10) and the associated slot (51) extends helically partially around the sleeve (49).

20 43. A filter assembly comprising a housing (10) having an inlet port (16) and an outlet port (31) and a filter element (11) that is integrity testable by the Diffusive Forward Flow Test or the Water Bubble Point Test, that is held in the housing (10) and that comprises a filter medium (34) having a central passage extending between the first and second ends of
25 the filter medium (34), the housing (10) being formed from a plastics material that is steam sterilizable.

44. A filter assembly according to claim 43, wherein the first end of the filter medium (34) is connected to a first end cap (35) to close said passage and the second end of the filter medium (34) is connected to a second end cap (36), said end caps (35,36) forming respective water-wettable joints with the filter medium.

45. A filter assembly according to claim 44, wherein the filter medium (34) is composed principally of PVDF which has been modified to make the medium water-wettable, and the end caps (35,36) are composed of polypropylene.

46. A filter assembly according to claim 44, wherein the filter medium (34) is composed principally of polysulphone which has been modified to make the medium water-wettable, and the end caps (35,36) are composed of polypropylene.

47. A filter assembly according to claim 44, wherein the filter medium (34) is a FLUORODYNE or SUPOR medium and the end caps (35,36) are composed of polypropylene.

48. A filter assembly according to claim 44, wherein the filter medium (34) is composed of a nylon material and the end caps (35,36) are composed of a polyester or a nylon material.

49. A filter assembly according to any one of claims 43 to 48, wherein the housing (10) is such that the assembly can be sterilized by subjecting the interior of the housing (10) to steam under pressure while the exterior of the housing (10) is at atmospheric pressure without damaging the housing (10).

50. A filter assembly according to any one of claims 43 to 48, wherein the housing (10) resists exposure of the interior of the housing (10) to steam at about 121°C and about 1 bar above atmospheric pressure while the exterior of the housing (10) is exposed to atmospheric pressure.

51. A filter assembly to any one of claims 43 to 50, wherein the housing (10) is composed of any one of polysulphone, PEEK, PEK, polyphenyleneoxide, polyphenylene-sulphide, polyethersulphone, polyalkoxysulphone or polyarylsulphone.

52. A valve for a filter assembly comprising an annular sleeve (49) surrounding a passage (46) of generally circular cross-section, movement of said sleeve (49) in one sense opening said valve and movement of said sleeve (49) in a sense opposite said one sense closing said valve.

53. A valve according to claim 52, wherein said passage (48) contains a valve member (43), movement of said sleeve (49) causing said valve member (43) to move between a first position in which said valve member (43) permits flow through said passage (48) and a second position in which said valve member (43) prevents flow through said passage (48).

54. A valve according to claim 52, wherein said valve member (43) moves axially relative to said passage (48) between said first and second positions.

55. A valve according to claim 54, wherein the sleeve (49) and the valve member (43) are connected together, the sleeve (49) surrounding said passage (48) and the valve member (43) extending into an end of said passage (48), said valve member (43) including a passage (48) which is in fluid communication with the port passage (48) when the valve is open and which is not in fluid communication when the valve is closed.

56. A valve according to claim 54 or claim 55, wherein a mechanism (27,51) acts between the sleeve (49) and the port such that rotation of the sleeve (49) results in axial movement of said valve member (43) between said first and second positions.

57. A valve according to claim 56, wherein said mechanism (27,51) limits the extent of the axial movement of the valve member (43).

5 58. A valve according to claim 56 or claim 57, wherein said mechanism comprises a pin (27) and a co-operating slot (51).

59. A valve according to claim 58 when dependent on claim 55, wherein the pin (27) is carried on an exterior surface of the port and the slot (51) extends helically partially around the sleeve (49).

10

60. A valve comprising a part defining a cylindrical passage (48) and a valve member (43) movable between a first position in which the member (43) sits in and seals against the circumference of the passage (46) to close the valve and a second position in which the member (43) is located out of the passage (48) to open the valve.

15

20 61. A valve according to claim 60, wherein the valve member (43) is connected to the part by a mechanism (27,51) which causes the member (43) to enter the passage (46) to form said seal as the member is rotated relative to the part.

62. A valve according to claim 61, wherein the valve member (43) is connected to a sleeve (49) extending around the part and said mechanism (27,51) acts between the sleeve (49) and the part.

5

63. A valve according to claim 61 or claim 62, wherein the part defines a chamber continuous with the passage (48), said valve member (43) lying in the chamber in said second portion.

10


64. A valve according to claim 63, wherein the part has a plurality of ribs (63,64) extending into said chamber, each rib having an edge leading to the circumference of the passage (46), said edges being spaced around the circumference of the passage (46), the valve member (43) carrying an O-ring (26) which forms said seal with the passage (46), the ribs (63,64) guiding the O-ring (26) into the passage on movement of the member into the first position.

15

20

65. A valve according to claim 67, wherein the valve member (43) moves on the axis of the passage (46).

1/3

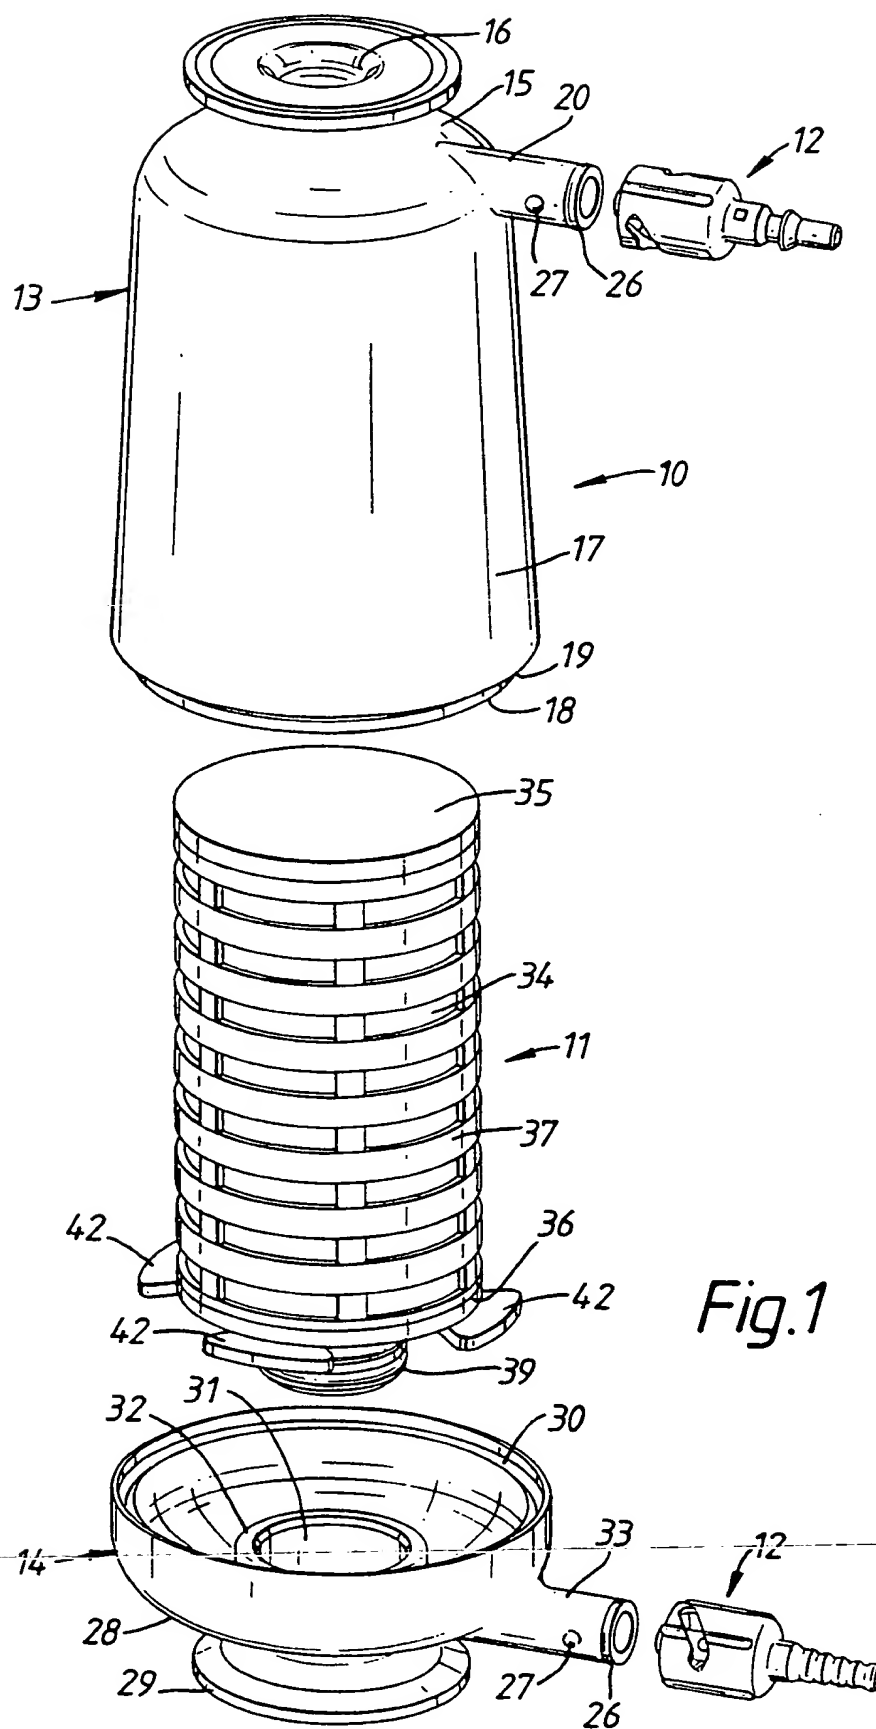

3/3

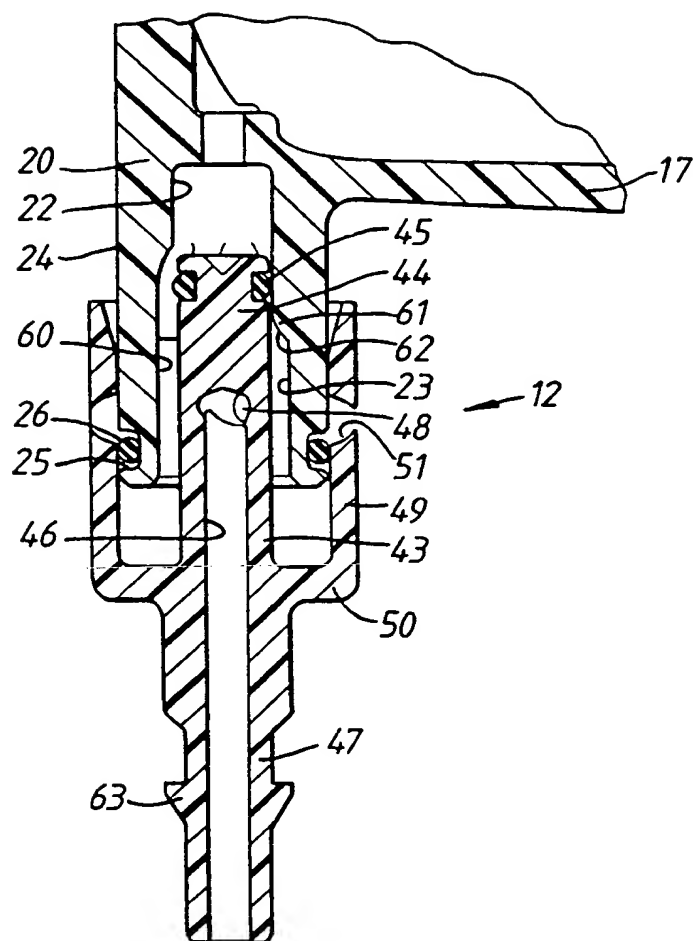


Fig. 3

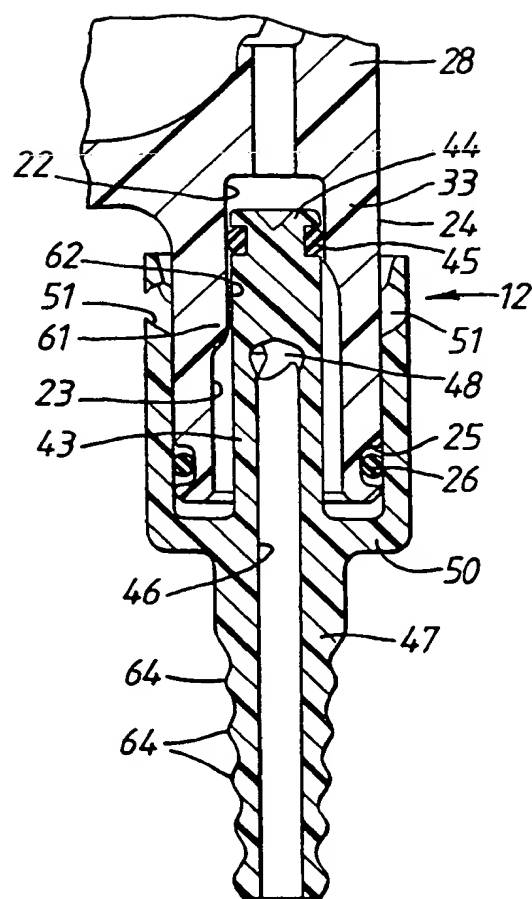


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/01975

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01D63/06 B01D65/00 B01D65/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 096 306 A (AMF INC.) 21 December 1983 ESPECIALLY PAGES 4-6, 9, 12, 18-22, 31 ---	1,43
Y	US 4 101 423 A (W. S. MERRILL ET AL.) 18 July 1978 ESPECIALLY CLAIMS AND COLUMN 2, LINES 33-61, COLUMN 3 LINE 61-COLUMN 4 LINE 12, COLUMNS 6-8, COLUMN 9 LINE 52-COLUMN 10 LINE 35 ---	1,43
Y	US 5 647 950 A (C. L. REED) 15 July 1997 ESPECIALLY COLUMN 13 LINE 13 TO COLUMN 14 LINE 4 ---	1,43
A	see the whole document ---	2
Y	US 3 939 078 A (F. M. SERVAS) 17 February 1976 ESPECIALLY COLUMN 2, LINES 26-32 ---	1,43
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

19 October 1998

Date of mailing of the international search report

07. 01. 99

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

DEVISME, F

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 98/01975

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

[illegible]

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 98/01975

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. Claims : 1-42 heat sterilizable plastic housing and water wettable joints between water wettable filter and end caps
2. Claims : 43-51 heat sterilizable plastic housing and integrity testable filter
3. Claims : 52-65 valve for filter assembly

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-51

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/01975

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 96306	A	21-12-1983	AU 1773483 A	16-12-1983
			CA 1184512 A	26-03-1985
			WO 8304186 A	08-12-1983
			US 4929354 A	29-05-1990
			US 4906371 A	06-03-1990
			CA 1200766 A	18-02-1986
			US 4579698 A	01-04-1986
US 4101423	A	18-07-1978	CA 1058096 A	10-07-1979
			DE 2614336 A	21-10-1976
			FR 2306001 A	29-10-1976
			GB 1543404 A	04-04-1979
			JP 51122871 A	27-10-1976
			JP 59023846 B	05-06-1984
			SE 427527 B	18-04-1983
			SE 7603933 A	05-10-1976
US 5647950	A	15-07-1997	CA 2072532 A	29-12-1992
			EP 0520737 A	30-12-1992
			JP 6142416 A	24-05-1994
US 3939078	A	17-02-1976	NONE	
US 4361483	A	30-11-1982	AT 24415 T	15-01-1987
			AU 531213 B	11-08-1983
			AU 9006182 A	12-05-1983
			BR 8206329 A	06-09-1983
			CA 1192143 A	20-08-1985
			DK 483482 A,B,	03-05-1983
			EP 0078419 A	11-05-1983
			FI 823722 A	03-05-1983
			JP 1376685 C	08-05-1987
			JP 58092437 A	01-06-1983
			JP 61044531 B	03-10-1986
			PT 75770 B	09-12-1985
			ZA 8207961 A	31-08-1983
US 5531848	A	02-07-1996	US 5543002 A	06-08-1996
			AT 144725 T	15-11-1996
			AU 4279493 A	13-12-1993
			CA 2135672 A	25-11-1993
			DE 69305742 D	05-12-1996
			DE 69305742 T	10-04-1997
			DK 641247 T	01-04-1997
			EP 0641247 A	08-03-1995
			GR 3022069 T	31-03-1997
			JP 9234351 A	09-09-1997
			JP 2618820 B	11-06-1997
			JP 7503407 T	13-04-1995
			WO 9323152 A	25-11-1996
			US 5554283 A	10-09-1996
EP 282045	A	14-09-1988	US 4839037 A	13-06-1989
			AT 110292 T	15-09-1994
			CA 1320143 A	13-07-1993
			DE 3851167 D	29-09-1994
			DE 3851167 T	13-04-1995
			JP 63291603 A	29-11-1989

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/01975

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4126559 A	21-11-1978	AT 365084 B	10-12-1981
		AT 217077 A	15-05-1981
		AU 507700 B	21-02-1980
		AU 2248277 A	31-08-1978
		BE 853015 A	30-09-1977
		BR 7701977 A	24-01-1978
		CA 1080130 A	24-06-1980
		DE 2710894 A	13-10-1977
		DK 138677 A,B,	01-10-1977
		FI 770920 A,B,	01-10-1977
		FR 2346035 A	28-10-1977
		GB 1532102 A	15-11-1978
		JP 1028887 C	22-01-1981
		JP 52119574 A	07-10-1977
		JP 55018124 B	16-05-1980
		NL 7703399 A	04-10-1977
		SE 441146 B	16-09-1985
		SE 7703577 A	01-10-1977
		ZA 7700961 A	28-12-1977